




ENGINEERED POWER LP

LMR3/2C-HT

High Temperature Discharge(100mA)

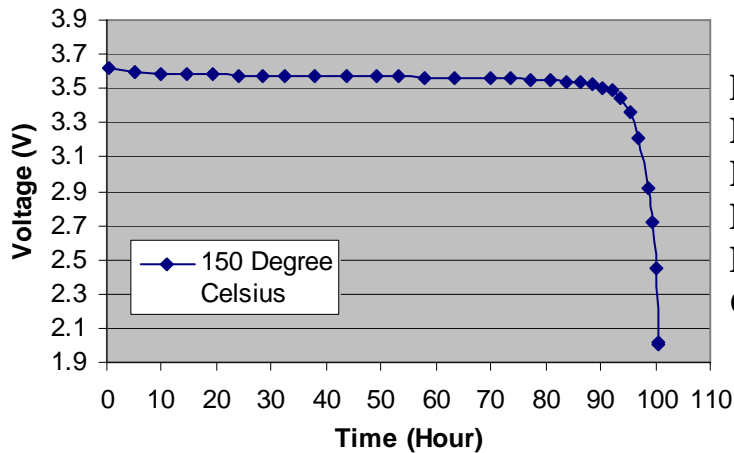

**Primary
High Energy
High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 10.0 Ah

Rated Current: 100 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions: 3.0 inch (76.2mm) x 0.98 inches (25.0mm) diameter

Weight: 3.0 ounces (85.0 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD)

ENGINEERED POWER LP
WHEN PERFORMANCE COUNTS

#109, 1120 – 53rd Ave N.E.
Calgary, Alberta, T2E 6N9
Canada

Phone: (403)235-2584
Fax: (403)235-2590
Web: <http://www.engineeredpower.com>

Updated: March 2006