




ENGINEERED POWER LP

LMRD-DA-HT

High Temperature Discharge
325mA, 150C

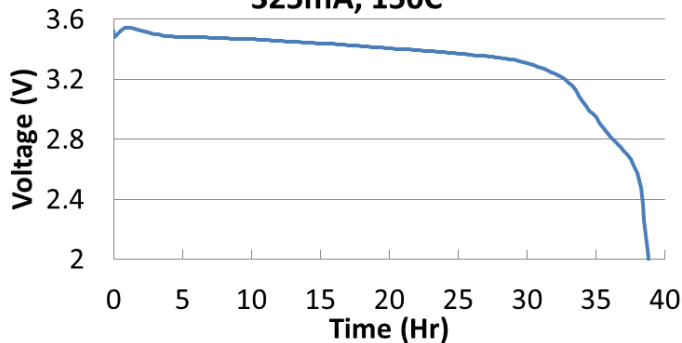

**Primary
High Energy
High Temperature
Moderate Rate
Lithium Thionyl Chloride
Custom Terminations**

TECHNICAL DATA:

Capacity: 13 Ah

Rated Current: 325 mA

Voltage: 3.67 V (Open Circuit)

Operating Temperature: -40°F to +302°F (-40°C to +150°C)

Physical Dimensions: 2.28 inch (58.0mm) x 1.25 inches (31.8mm) diameter

Weight: 3.5 ounces (100 grams ±5 grams)

Suitable Applications: Measurement While Drilling (MWD), Logging While Drilling (LWD)
Oil Well Instrumentation

ENGINEERED POWER LP

WHEN PERFORMANCE COUNTS

#20, 3103 - 14th Ave N.E.
Calgary, Alberta, T2A 7N6
Canada

Phone: (403)235-2584

Fax: (403)235-2590

Web: <http://www.engineeredpower.com>

Updated: August, 2011